



Specialists In Quality Lubricant



AUTOMOTIVE
LUBRICANTS



MARINE
LUBRICANTS



AUTOMOTIVE
GREASE



ADDITIVE
& CHEMICALS



BRAKE FLUID
& COOLANT



BASE OIL



About Us

STANLEY GROUP is fastest growing group of companies in Middle East Asia & our activities are focused to Petroleum Products in United Arab Emirates & we are leading producers of Automotive Lubricants, Automotive Greases, Industrial Lubricants, Insulating Oils, Brake Fluids, specialty Lubricants. STANLEY Group is also trading petroleum derivatives viz. Base Oils, Additives, Polymers and specialty chemicals viz. Highly Re-Refined Base Oils, Group I, Group II, Group III, Group IV and Group V; our quality and commitments are the main driving factors of our growth. **PRIME** is a premium brand of STANLEY GROUP.

STANLEY has grown from strength to strength in the past decade and is recognized as an well-reputed organization with many offices, plants and huge storage capacity tanks in UAE and abroad, our manufacturing facilities are in UAE and currently we are producing huge quantities of Automotive Lubricants, Industrial Lubricants, Food Grade Lubricants ,our plant is certified with ISO 9001:2008 & our products are endorsed by ESMA “Emirates Authority For Standardization & Metrology” (HIGHEST STANDARDIZATION ORGANIZATION IN UAE), and goes through stringent quality parameters of Original Equipment Manufacturer, Society of Automobile Engineers, American Petroleum Institute and ACEA; our quality products are exported globally.

STANLEY GROUP is managed by highly qualified, skilled and experienced teams in respective departments and our “blending excellence” transformed into “TOTAL RELIABILITY” to customers and partners globally.





Motorcycle & Motor Oil



4-Stroke Motorcycle Oil SAE 10W-30 API SN JASO MA2

PRIME MOTO 4T SAE 10W-30 API SN JASO MA2 is a synthetic 4-Stroke engine lubricant. It has excellent shear resistance protecting engine and gearbox and smooth shifting of clutches meets JASO MA2 specifications for optimal wet clutch performance. It is specially formulated with highly refined base stock, and proprietary additives.

- Outstanding thermal and oxidation stability
- Outstanding low temperature properties
- Excellent detergent/dispersant capability
- Consistent power due to reduced frictional losses

AVAILABLE PACKS
1L 2L 208L



Motor Engine Oil SAE 5W-30 API SN

PRIME SAE 5W-30 API SN is a synthetic engine oil for gasoline passenger's cars engines, particularly suitable for turbo compressed, multi-valve and direct injection engines. It can be used in the most difficult operating conditions and is appropriated for all driving types. Especially adapted to long oil change intervals. Europe, Japan or other Asian countries.

APPLICATION BENEFITS:

- Strong protection throughout a long drain interval
- Outstanding thermal and oxidation stability
- Outstanding low temperature properties
- Excellent detergent/dispersant capability

AVAILABLE PACKS
1L 4L 5L 20L 208L



4-Stroke Motorcycle Oil SAE 25W-60 API SN JASO MA2

PRIME MOTO 4T SAE 25W-60 API SN JASO MA2 is a synthetic 4-Stroke engine lubricant. It has excellent shear resistance protecting engine and gearbox and smooth shifting of clutches meets JASO MA2 specifications for optimal wet clutch performance. It is specially formulated with highly refined base stock, and proprietary additives.

- Outstanding thermal and oxidation stability
- Outstanding low temperature properties
- Excellent detergent/dispersant capability
- Consistent power due to reduced frictional losses

AVAILABLE PACKS
1L 2L 208L



Motor Engine Oil SAE 10W-30 API SN

PRIME SAE 10W-30 API SN is a fully synthetic engine oil for gasoline passenger's cars engines, particularly suitable for turbo charged, multi-valve and direct injection engines. It can be used in the most difficult operating conditions and appropriate for all driving terrain. Especially adapted to long oil change intervals.

APPLICATION BENEFITS:

- Strong protection throughout a long drain interval
- Outstanding thermal and oxidation stability
- Outstanding low temperature properties
- Excellent detergent/dispersant capability

AVAILABLE PACKS
1L 4L 5L 20L 208L



4-Stroke Motorcycle Oil SAE 20W-40 API SN JASO MA2

It is developed with Synthetic oil and the latest additive technology to achieve exceptional resistance to oxidation and wear of cylinders, rings and valve train in high compression and high revolution 4-stroke engines while protecting the transmission gears, Its advanced technology in additives and oil provides benefits such as:

- Maximum Clutch Grip
- Friction Control Between Discs And Plates
- Maximum Transmission Protection
- Minimum Wear Of Rings And Bearings
- Maximum Internal Cleaning

AVAILABLE PACKS
1L 2L 208L



Motor Engine Oil SAE 5W-30 API SP ILSAC GF 6B

PRIME SAE 5W-30 API SP ILSAC GF 6B is a fully synthetic engine oil for gasoline passenger's cars engines, particularly suitable for turbo compressed, multi-valve and direct injection engines. It can be used in the most difficult operating conditions and is appropriated for all driving types. Guaranteed protection against Low Speed Pre-Ignition (LSPI) and timing chain wear.

APPLICATION BENEFITS:

- Strong protection throughout a long drain interval
- Outstanding thermal and oxidation stability
- Outstanding low temperature properties
- Excellent detergent/dispersant capability

AVAILABLE PACKS
1L 4L 5L 20L 208L



4-Stroke Motorcycle Oil SAE 20W-50 API SN JASO MA2

PRIME MOTO 4T SAE 20W-50 API SN JASO MA2 is a synthetic 4-Stroke engine lubricant. It has excellent shear resistance protecting engine and gearbox and smooth shifting of clutches meets JASO MA2 specifications for optimal wet clutch performance.

- Overall optimized balance of engine performance
- Friction Control Between Discs And Plates
- Ultimate confidence of protection throughout drain interval
- Minimum Wear Of Rings And Bearings
- Maximum Internal Cleaning

AVAILABLE PACKS
1L 2L 208L



Motor Engine Oil SAE 0W-20 API SN

PRIME SAE 0W-20 API SN is a fully synthetic engine oil for gasoline passenger's cars engines, particularly suitable for turbo charged, multi-valve and direct injection engines. It can be used in the most difficult operating conditions and suitable for all roads. Especially adapted to long oil change intervals.

APPLICATION BENEFITS:

- Strong protection throughout a long drain interval
- Outstanding thermal and oxidation stability
- Outstanding low temperature properties
- Excellent detergent/dispersant capability

AVAILABLE PACKS
1L 4L 5L 20L 208L



Diesel & Transmission



Diesel Engine Oil SAE 10W-30 API CK-4/SN

PRIME SAE 10W30 API CK-4/SN is extra high performance Heavy- Duty Diesel Engine Oil specially developed for use in modern, low emission diesel engines, including those fitted with Exhaust Gas Re-Circulation (EGR) systems.

APPLICATION BENEFITS:

- Strong protection throughout a long drain interval
- Outstanding low temperature properties
- Excellent detergent/dispersant capability
- Outstanding thermal and oxidation stability

AVAILABLE PACKS

1L 4L 5L 20L 208L



Gear Oil SAE-90 API GL-5

"PRIME GEAR OIL SAE-90 API GL-5" is a premium grade gear lubricant in a wide range of automotive transmissions. This is formulated from excellent quality base stocks and performance proven extreme pressure additives to provide protection to gear components against wear, scoring, oxidation and rust.

BENEFITS:

- Maximum thermal stability
- Excellent protection against rust
- Excellent Lubricity to Gear
- Prime others Excellent Cleanliness & Detergency
- Inccres parts Life

AVAILABLE PACKS

1L 4L 5L 20L 208L



Diesel Engine Oil SAE 15W-40 API CI-4/SL

PRIME SAE 15W-40 API CI-4/SL is extra high performance Heavy- Duty Diesel Engine Oil specially developed for use in modern, low emission diesel engines, including those fitted with Exhaust Gas Re-Circulation (EGR) systems.

APPLICATION BENEFITS:

- Strong protection throughout a long drain interval
- Outstanding low temperature properties
- Excellent detergent/dispersant capability
- Outstanding thermal and oxidation stability

AVAILABLE PACKS

1L 4L 5L 20L 208L



Gear Oil SAE-140 API GL-4

PRIME GEAR OIL SAE-140 is a premium quality mineral base mono grade manual gearbox oil. It uses the latest technology, purpose designed additives for long service life and contains bright stock and highly refined base oil.

BENEFITS:

- Maximum thermal stability
- Excellent protection against rust
- Excellent Lubricity to Gear
- Prime others Excellent Cleanliness & Detergency
- Inccres parts Life

AVAILABLE PACKS

1L 4L 5L 20L 208L



Diesel Engine Oil SAE 50 API CH-4

PRIME SAE 50 is modern high technology based diesel engine oil exceeding the latest API CH-4 performance specification. Developed to provide maximum protection for use in modern passenger cars including low emission engines and high performance vehicles.

APPLICATION BENEFITS:

- Strong protection throughout a long drain interval
- Outstanding low temperature properties
- Excellent detergent/dispersant capability
- Outstanding thermal and oxidation stability

AVAILABLE PACKS

1L 4L 5L 20L 208L



Automatic Transmission Fluid ATF Dexron III

PRIME ATF DEX III is Universal fully synthetic Automatic Transmission Fluid is formulated with synthetic base stocks and technologically advanced additives that provide oxidation and thermal stability, friction control, load-carrying ability, as well as corrosion and wear protection.

BENEFITS:

- Very good thermal stability.
- Excellent resistance to oxidation.
- Good shear strength.
- Excellent parts material compatibility
- Very low pour point

AVAILABLE PACKS

1L 4L 5L 20L 208L



Diesel Engine Oil SAE 10W-30 API CJ-4/SN

PRIME SAE 10W-30 API CJ-4/SN is a fully synthetic engine oil for diesel engines, particularly suitable for turbo charged, multi-valve and direct injection engines. It can be used in the most difficult operating conditions and is appropriate for all roads.

BENEFITS:

- Strong protection throughout a long drain interval
- Outstanding thermal and oxidation stability
- Outstanding low temperature properties
- Excellent detergent/dispersant capability

AVAILABLE PACKS

1L 4L 5L 20L 208L



ATF CVT CONTINUOUSLY VARIABLE TRANSMISSION FLUID

PRIME CVT FLUID is formulated with premium full synthetic base oils and technologically advanced additives. This high performance chemistry is specifically engineered for and unique to CVT applications; offering outstanding anti-shudder durability, friction stability, anti-wear protection, and advanced low and high temperature operation characteristics.

APPLICATION BENEFITS:

- Metal Anti-wear on pull-chain CVTs
- Good shear stability, anti-foaming and ant wear
- Effective foam control properties
- Good performance on high torque applications

AVAILABLE PACKS

1L 4L 5L 20L 208L



Speciality Oil

ANTIFREEZE COOLANT

50%

PRIME Antifreeze is a superior quality coolant. It is an ethylene glycol based product that incorporates powerful additive technology to ensure year-round protection against freezing and corrosion. Our Antifreeze is free from Nitrites, Nitrates, Borates and Phosphates

PERFORMANCE FEATURES:

- Guards against corrosion and rust.
- Suitable for all water cooled petrol and diesel engines
- Improves efficiency and reduces operating costs.

AVAILABLE PACKS

1L 4L 5L 20L 208L



ANTIFREEZE COOLANT

100%

PRIME Antifreeze is a concentrated superior quality coolant. It is an ethylene glycol based product that incorporates powerful additive technology to ensure year-round protection against freezing and corrosion. Our Antifreeze is free from Nitrites, Nitrates, Borates and Phosphates

PERFORMANCE FEATURES:

- Guards against corrosion and rust.
- Suitable for all water cooled petrol and diesel engines
- Improves efficiency and reduces operating costs.

AVAILABLE PACKS

1L 4L 5L 20L 208L



Brake Fluid

DOT 4

PRIME Super HD Brake Fluid DOT 4 is extra high performance poly glycol based brake fluid developed for superior braking performance in a wide range of vehicles including those operating at higher temperatures. It contains oxidation and corrosion inhibitors to resist oxidation at the high temperatures encountered in the disc braking systems and to provide superior protection against corrosion of metallic components of the brake system.

AVAILABLE PACKS

250G 500GM



Brake Fluid

DOT 3

PRIME Brake Fluid DOT 3 is a glycol-based brake fluid designed for use in hydraulic brake system of any commercial vehicles, passenger cars and motorcycles operating under moderate service conditions and requiring a DOT 3 type of fluid. It provides lubricity and system protection. Also, compatible with all seals and metals used in conventional braking systems.

AVAILABLE PACKS

250G 500GM



EP GREASE

LITHIUM EP GREASE

A high quality multipurpose extreme pressure lithium soap based grease for use in a wide range of industrial applications. These are manufactured from highly refined base oils and performance additives to provide excellent wear protection, good structural stability, resistance to water washout and effective protection from corrosion.

Benefits: it protects from :

- * Water washout and bearing corrosion
- * Process water contamination
- * Extreme pressure

AVAILABLE PACKS

500G 1KG 3KG 15KG



MULTIPURPOSE GREASE

CALCIUM MP GREASE

Multipurpose calcium soap based grease is designed to lubricate automotive bearings in wet, normal-temperature and normal load applications. It is formulated to remain stable and perform well under all conditions.

Benefits:

- * Good corrosion protection.
- * Good low temperature fluidity.
- * Resistance to water washout.
- * Pumpability even in cold weather.

AVAILABLE PACKS

500G 1KG 3KG 15KG 180 KG



Hydraulic Oil

ISO 68

Hydraulic oil ISO 68 range is high quality premium grade Hydraulic Oils, produced with unique technology to provide outstanding protection and performance. It is used in most hydraulic system of many mobile equipments.

Product Benefits:

1. Excellent wear protection and longer life to moving parts.
2. Rust and corrosion protections.
3. Excellent oxidation resistance to deforming properties.
4. Stable film strength for boundary lubrication.

AVAILABLE PACKS

1L 4L 5L 20L 208L



TRANSMISSION OIL

10W

PRIME SAE 10W is a mineral oil used in engine and hydraulic system of palyouders, particularly suitable for transmission and direct injection engines. It can be used in the most difficult operating conditions and is appropriated for all load conditions.

BENEFITS:

- Strong protection throughout a long drain interval
- Outstanding thermal and oxidation stability
- Outstanding low temperature properties
- Excellent detergent/dispersant capability

AVAILABLE PACKS

208L





STD 417-0022 approval
HENKEL INTERNATIONAL LUBRICANTS INDUSTRY L.L.C

Customer name: HENKEL INTERNATIONAL LUBRICANTS INDUSTRY L.L.C
 Product name: PRIME SAE 15W-40 API CI-4 SL
 Oil viscosity: ISO-VG 15W-40
 Viscosity grade: ISO-VG 15W-40

Ultra VCI-3 approval	Yes
Black VCI approval	Yes
Manual VI M2-2 approval	Yes

Approval date: February 12, 2021 Approval #: 417-0002-21-2033

Validity: Approval expires two years after the approval date. For ongoing extension, a complete and updated approval form must be submitted at the expiry date ± two months.



Volvo Group Trucks Technology

Disclaimer: This approval is solely based on information submitted by the applicant and no further quality check is made by Volvo. Hence, Volvo takes no responsibility to ensure that the quality of this product is continuously maintained. This is the sole responsibility of the Company (see above).



Statement of Quality

PRIME SAE 15W-40 API CI-4/SL

We hereby confirm that PRIME SAE 15W-40 API CI-4/SL Engine Oil formulated and blended with Afton Chemical Ltd additive package, ITCV 12000 at 300W, meets formulation code L88-0187818 SAE 15W-40 meets the performance of:

Caterpillar EC2-Caterpillar EC2-1a

This statement is invalid if the formulation and/or recommended blending procedures have been changed.

For Afton Chemical Ltd.

Wahid
 Sales Manager
 Afton Chemical Ltd
 Sultanate Industrial Services Sociaty

January 2021



Afton Chemical Ltd
 29th Floor, Industrial Building, 410, Al Jufra Road, Jebel Ali
 P.O. Box 42581, Dubai, UAE. Tel: +971 4 360 0000
 www.aftonchemical.com
 The product is a registered trademark of Afton Chemical Ltd.
 All rights reserved. © 2020 Afton Chemical Ltd.

Form D.1 Template for the EELQMS Lubricant marketers' Letter of Conformance

Issue 21, May 2019



SAE Form No. D.1
 Revised 0 10/40
 Belgium

From: HENKEL INTERNATIONAL LUBRICANTS INDUSTRY L.L.C
 P.O. Box 5082 NEW INDUSTRIAL AREA, AJMAN
 UNITED ARAB EMIRATES

SM@stelljolubes.com | JAH@stelljolubes.com
 Date: 13-09-2021

Subject: Participation in the ATEL European Engine Lubricants Quality Management System's Letter of Conformance

HENKEL INTERNATIONAL LUBRICANTS INDUSTRY L.L.C, hereinafter referred to as "the Company", duly represented by the undersigned acting for the Company and entitled acting under its Management System (MS) ISO 9001.

The commitments referred to in this letter apply to all products brand owned or managed by the Company that make ACEA (see:

STANLEY
 SYNTHOLIC
 PRIME



*The list should include just the generic brand name and not the specific motor nomenclature and not all product items.
 *Manufacturers who manufacture products for brands that are not listed in this letter, independent marketers should not include their brands in the list.

ATEL Code of Practice
 SA/TEL 2019

D-10



CERTIFICATION Environmental Management System

Certificate of Approval
 This is to certify that the EMS of Henkel International Lubricant Industry LLC New Industrial Area - Near Al Madena Bakery - Ajman - United Arab Emirates Has been assessed and found to meet the requirements of ISO 14001:2015

This certificate is valid for the following scope of operations

Manufacturers of Lubricants, Industrial Oils, Hydraulic Oils & Greases, Marketing of Lube Additives, Base Oil, Stroke fluids and other Petroleum Products, Importing, Wholesale of Oil Recycling derivatives Trading, Exporting, Petroleum Materials Land Transportation

Authorised by: *R.N. Cooke* R N Cooke Director

Date of Certificate Issue: 18 January 2020
 Certificate Valid Until: 31 January 2022
 Reassessment Audit before 31 December 2021. Certified since 13 January 2020.
 This certificate has the approval of the Registrar General and is entered into the public Register of Certifications issued by Environmental Management.

SN Registrars (Holdings) Limited
 Registration House, 228 Church Street, Buxton, Northamptonshire, NN16 9JY, UK
 Tel: +44 (0) 1833 383361
 Email: enquiries@sn-reg.co.uk
 Web: www.sn-reg.co.uk
 Company Number: 07650607



SCHEDULE A - LICENSE AGREEMENT

The marks referred to and licensed under the Agreement between API and HENKEL INTERNATIONAL LUBRICANT INDUSTRY LLC may be used through 31-Mar-2022 as follows:

Licenses are authorized to display the API Certification Mark on the following products:

BRAND NAME	SAE VISCOSITY GRADE	API SERVICE CATEGORY	CLASSIFICATION
PRIME	89-16	SP	Rotational Contaminant, SHUTDOW
PRIME	89-30	SP	Rotational Contaminant, SHUTDOW
PRIME	89-50	SN	Rotational Contaminant, SHUTDOW
PRIME	89-30	SP	Rotational Contaminant, SHUTDOW
PRIME	89-30	SN	Rotational Contaminant, SHUTDOW
PRIME	89-40	SN	Rotational Contaminant, SHUTDOW
PRIME	100-30	SL	Rotational Contaminant, SHUTDOW
PRIME	100-40	SN	Rotational Contaminant, SHUTDOW
PRIME	100-40	SL	Rotational Contaminant, SHUTDOW
PRIME	100-40	SH	Rotational Contaminant, SHUTDOW
PRIME	150-40	SH	Rotational Contaminant, SHUTDOW
PRIME	150-40	CI-4SL	Rotational Contaminant, SHUTDOW
PRIME	150-40	CI-4SE	Rotational Contaminant, SHUTDOW
STANLEY	89-16	SP	Rotational Contaminant, SHUTDOW
STANLEY	89-30	SP	Rotational Contaminant, SHUTDOW
STANLEY	89-30	SN	Rotational Contaminant, SHUTDOW
STANLEY	100-30	SL	Rotational Contaminant, SHUTDOW
STANLEY	100-40	CI-4SL	Rotational Contaminant, SHUTDOW
STANLEY	100-40	CI-4SE	Rotational Contaminant, SHUTDOW
STANLEY	150-40	SH	Rotational Contaminant, SHUTDOW
STANLEY	200-00	CH-4SL	Rotational Contaminant, SHUTDOW

Engine Oil Licensing and Certification System
 Manager: POLCOSEPMOHN
 Date: 14-Sep-2021



SCHEDULE A - LICENSE AGREEMENT

The marks referred to and licensed under the Agreement between API and HENKEL INTERNATIONAL LUBRICANT INDUSTRY LLC may be used through 31-Mar-2022 as follows:

Licenses are authorized to display the API Certification Mark on the following products:

BRAND NAME	SAE VISCOSITY GRADE	LSAC SPECIFICATION
PRIME	89-20	GF-4A
STANLEY	89-20	GF-4A
STANLEY	89-20	GF-4A
STANLEY	89-20	GF-4A
STANLEY	89-20	GF-4A
STANLEY	89-20	GF-4A

Engine Oil Licensing and Certification System
 Manager: POLCOSEPMOHN
 Date: 14-Sep-2021

**UNITED ARAB EMIRATES
 MINISTRY OF INDUSTRY & ADVANCED TECHNOLOGY**

الإمارات العربية المتحدة
 وزارة الصناعة والتكنولوجيا المتقدمة


Ministry of Industry & Advanced Technology
 Certificates of Conformity
 SGS Gulf Limited

Modified body by Ministry of Industry and Advanced Technology

رقم الشهادة: 21-09-2088021-09-055723
 تاريخ التسجيل: 30-September-2021
 تاريخ الصلاحية: 29-September-2022
 المرسل إليه: Henkel International Lubricant Industry L.L.C / DBR
 العنوان: P.O.Box Ajman, 2022, United Arab Emirates

القسم: Petroleum products
 الفئة: المنتجات البترولية
 التنظيم: Petroleum products
 التصنيف: المنتجات البترولية
 فئة المنتج: Lubricating oil for Internal Combustion Engines
 الفئة الفرعية: زيوت تصريف المحرك البنزيني
 تصنيف المنتج الفرعي: Lubricating oil for Internal Combustion Engines
 الفئة الفرعية الفرعية: زيوت تصريف المحرك البنزيني
 نوع المنتج: زيوت تصريف المحرك البنزيني
 تصنيف المنتج النهائي: فئة المنتجات البترولية

Reference listed in the attached Reduction of Certification are registered under the Emirates Conformity Assessment Scheme (ECAS) based on compliance to the Assessment Structure.
 For more information on ECAS and how to register, please visit the ECAS-CCDC website.
 Any change or modification on this certificate will affect its validity.

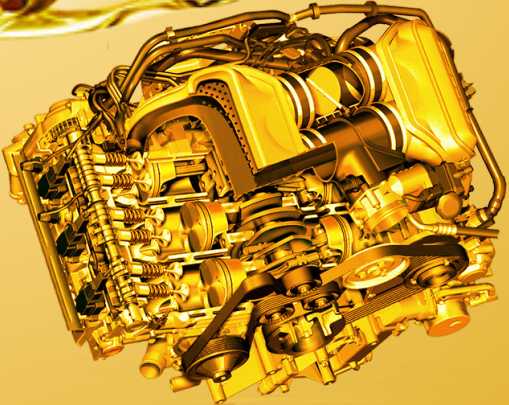

**Manufactured by
 HENKEL INTERNATIONAL LUBRICANT INDUSTRY LLC
 P.O. Box 5082, United Arab Emirates, www.PRIMEoil.org**

